




Description

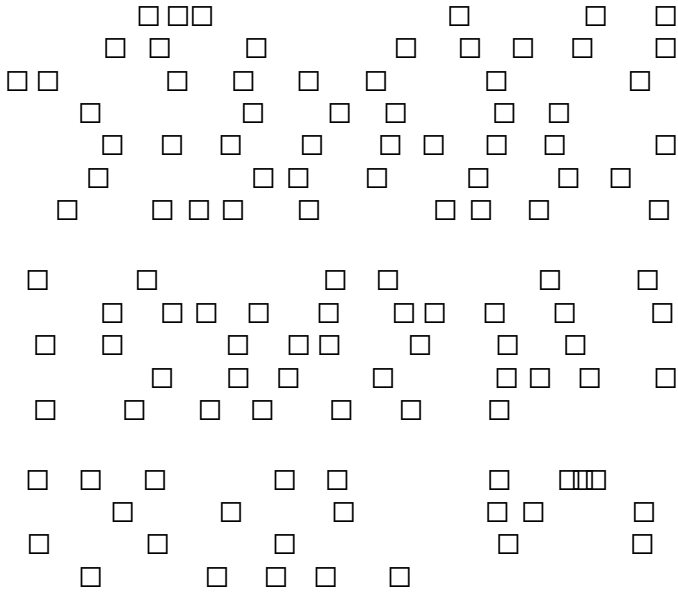

Functional Block Diagram

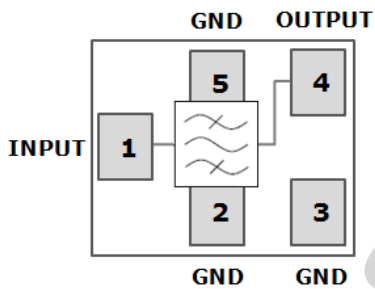

Features

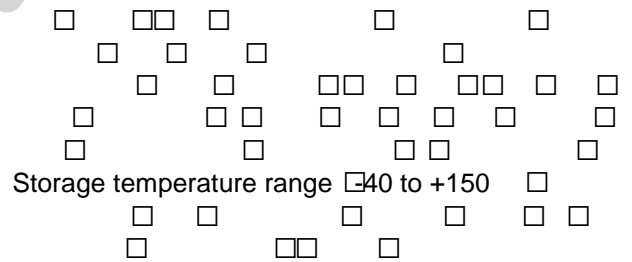

Pin Connection

□	□
□	□
□	□
□	□

Environmental



Electrical Specifications

□
□

Parameter(Operable Temperature: -20 to +85°C)	Min	Typ ⁽¹⁾	Max ⁽²⁾	Unit
Insertion Loss	□	□	□	□
Ripple	□	□	□	□
VSWR Input	□	□	□	□
VSWR Output	□	□	□	□
Absolute Attenuation			□	
□□ □ □	□	□	□	□
□□ □ □	□	□	□	□
□□ □ □	□	□	□	□
□□ □ □	□	□	□	□
□□ □ □ □	□	□	□	□
□□ □ □ □	□	□	□	□
□□ □ □ □	□	□	□	□
□□ □ □ □	□	□	□	□
□□ □ □ □	□	□	□	□
□ □ □□ □ □ □		□		□
Typ Data □□ □ □ □ □ □ □ □ □		□		□
Min/Max Data □□ □ □ □ □ □ □		□		□
Input power □ □ □□ □ □ □ □ □ □ □		□		□

□

Typical Performance at Tc=25° C

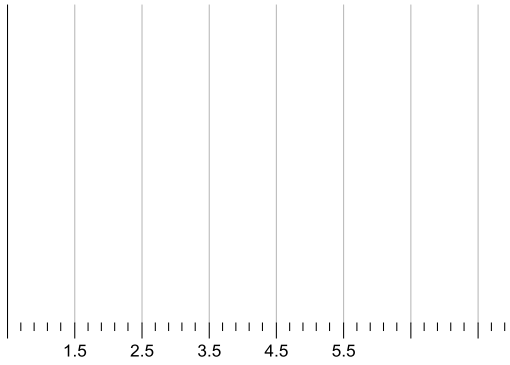


Figure.1 Wideband Insertion Loss

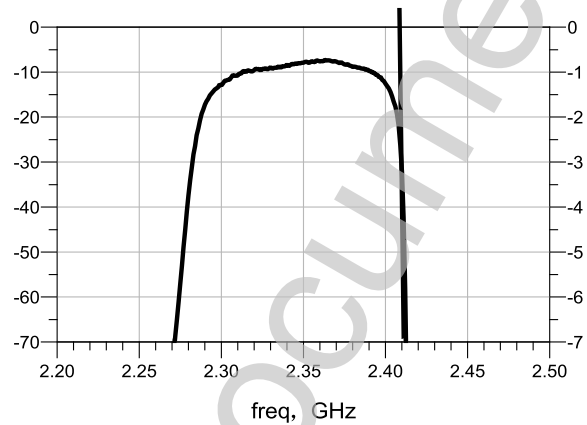


Figure.2 Narrowband Insertion Loss

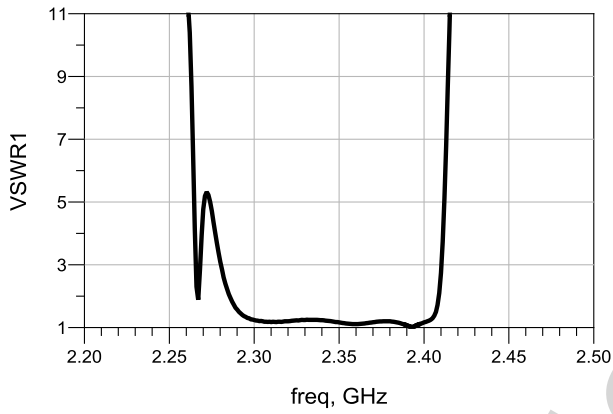


Figure.3 Input VSWR S11

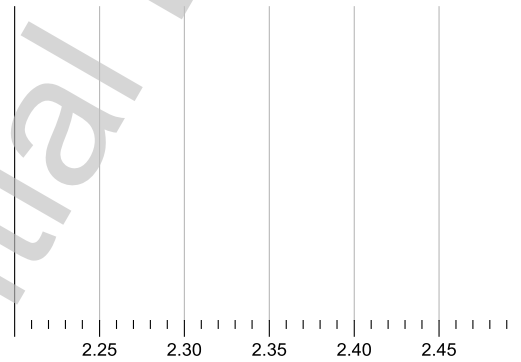


Figure.4 Output VSWR S22

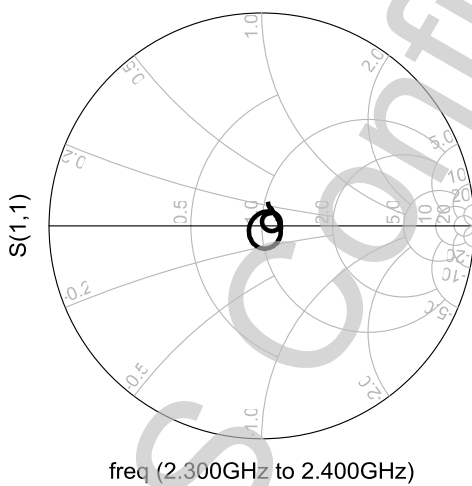


Figure.5 Input Smith Chart S11



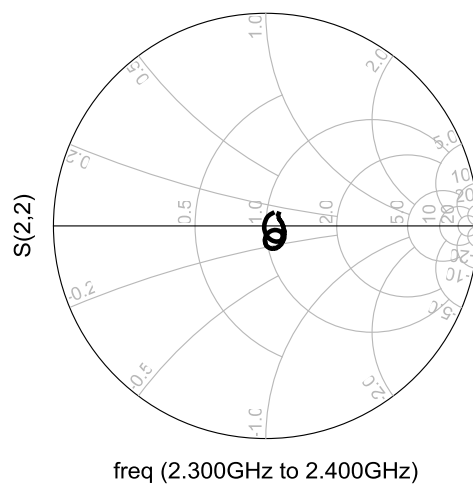


Figure.6 Output Smith Chart S22


Package Outline Drawing

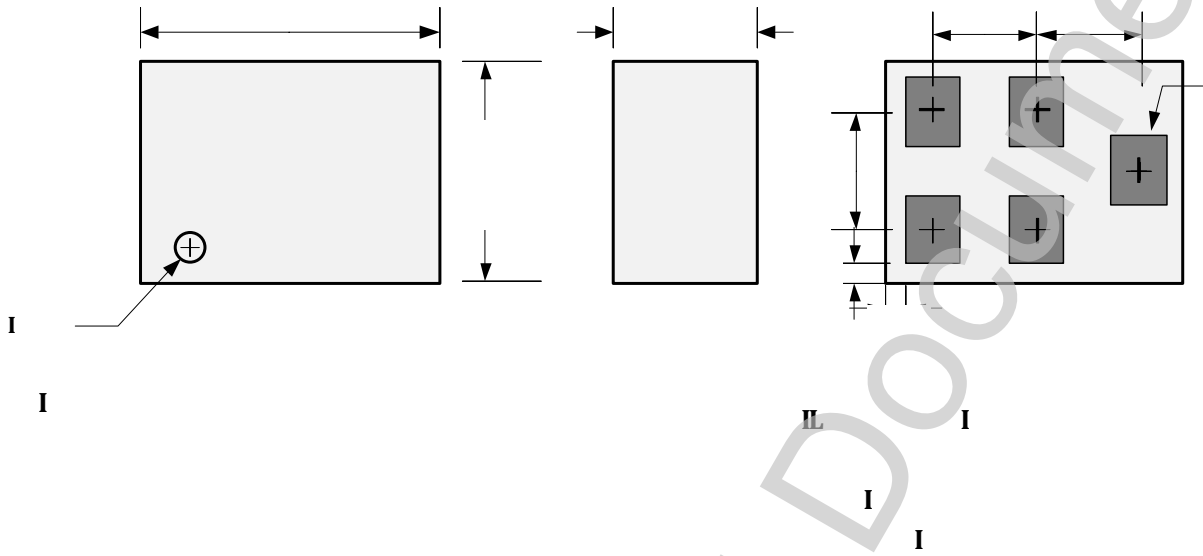

Test Circuit

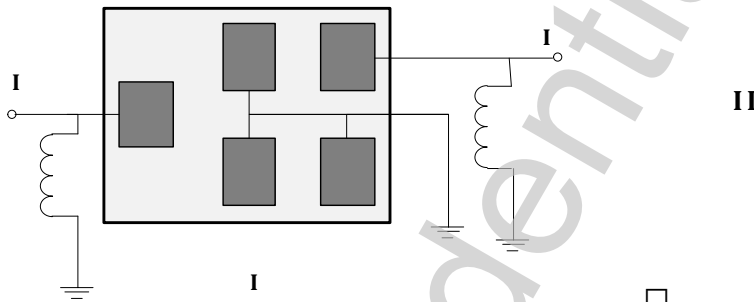


PCB Footprint

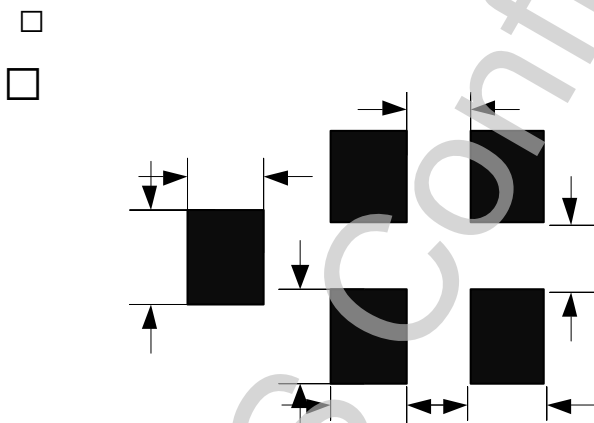

Packing

1. Tape Dimension

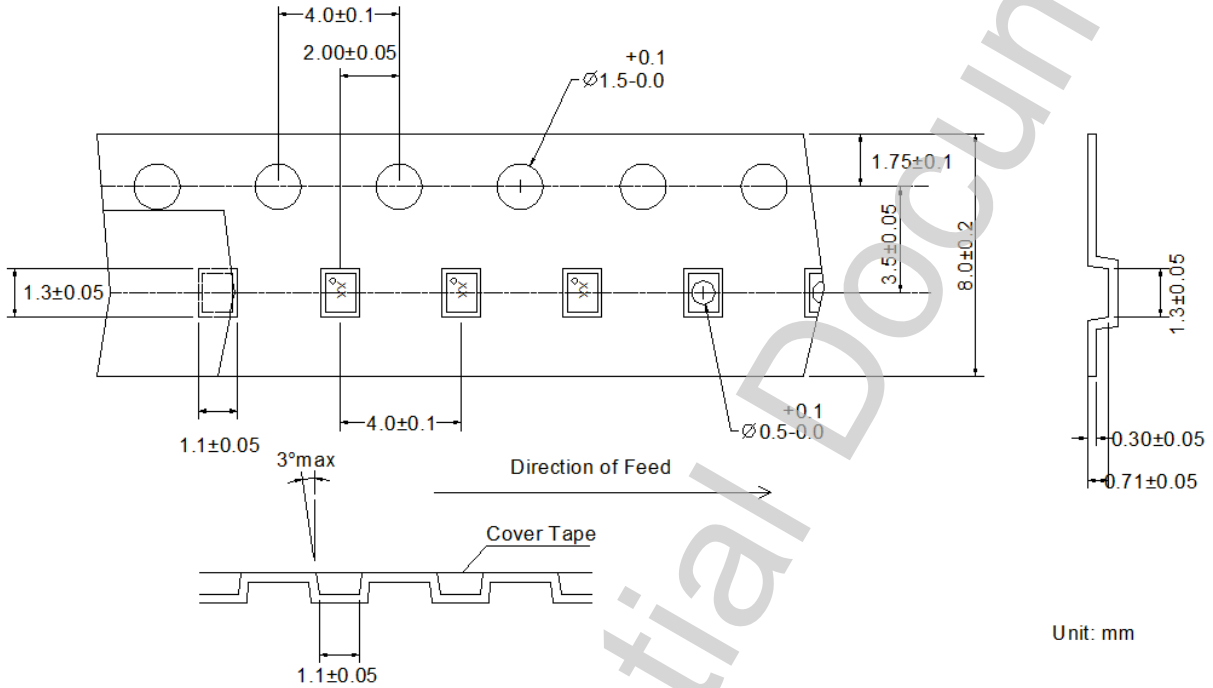

2. Reel Dimension

